


TP 18 200 E

Technical data	
Type	TP 18 200 E
Control sensor	Internal
Micro Bath	
Temperature range	
Tolerance	
Stability	
Measurement zone	
Dry block	
Temperature range	RT...200 °C
Tolerance	±1 °C
Stability	±0.1 °C
Measurement zone	60...100 mm
Infrared	
Temperature range	
Tolerance	
Stability	
Measurement zone	
Surface	
Temperature range	
Tolerance	
Stability	
Measurement zone	
Block	
	∅ 18 mm / depth 100 mm
Display	
Display	2-line, 4-digit display Red / green, unit °C [°F optional]
Display range	0...200 °C
Resolution	1 °C
General data	
Dimensions	
→ Width	220 mm
→ Height	96 mm
→ Depth	230 + 50 mm
Weight	Approx. 4 kg
Power supply	230 VAC, ±10 %, 50 / 60 Hz, optional 115 VAC, ±10 %, 50 / 60 Hz
Power consumption	Approx. 220 VA

Type TP 18 200 E

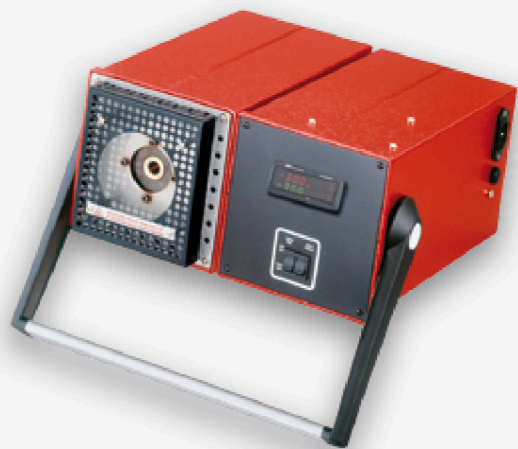

Scope of delivery

- Test certificate
- Mains cable
- Insert exchange tool
- Operating manual

Optional accessories

- Transport case
- Adapter sleeve
- DKD certificate
- Works certificate