



SPEC - IGN TRANS

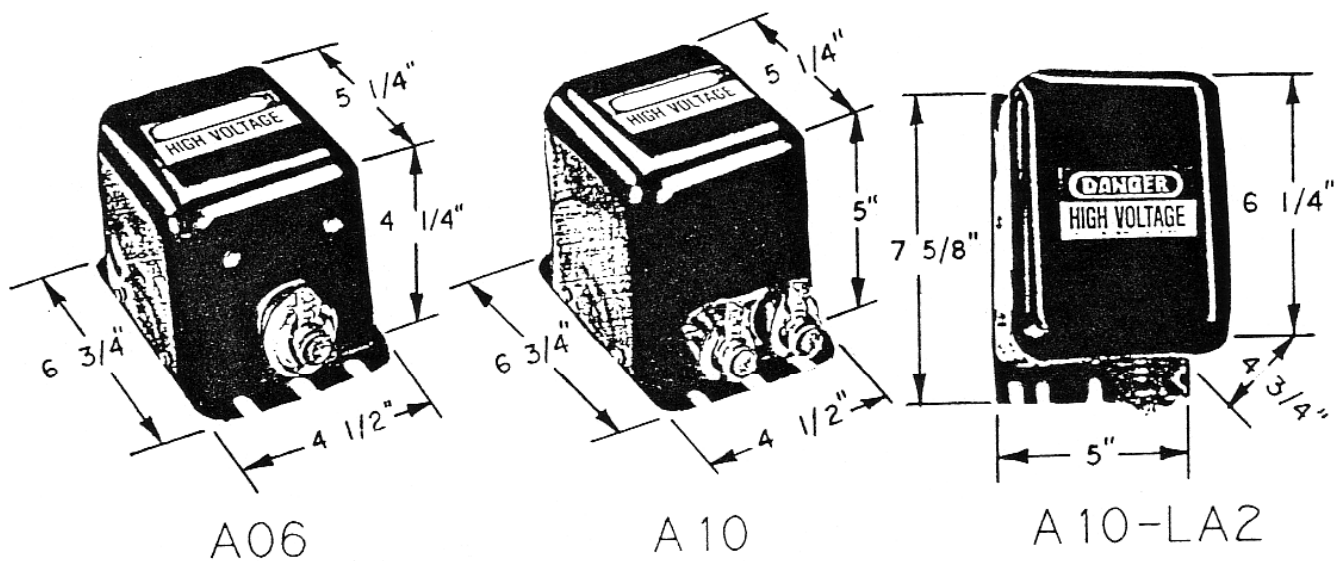

\* FROM HIGH VOLTAGE TERMINAL TO CASE GROUND.

IGNITION TRANSFORMERS	A06	A10	A10-LA2
PRIMARY VOLTAGE	115V. 60HZ.	115V. 60HZ.	115V. 60HZ.
SECONDARY VOLTAGE	1 - 6000V. - TAP*	2 - 5000V. -TAPS*	1 - 10000V. -TAP*
POWER CONSUMPTION	175VA.	250VA.	250VA.
MAXIMUM TEMPERATURE	120°F	120°F	120°F
MAXIMUM SPARK GAP	1/16"	1/16"	1/8"
DIMENSIONS	6 3/4HX4 1/2WX4 1/4D	6 3/4HX4 1/2WX 5D	7 5/8HX 5WX4 3/4D

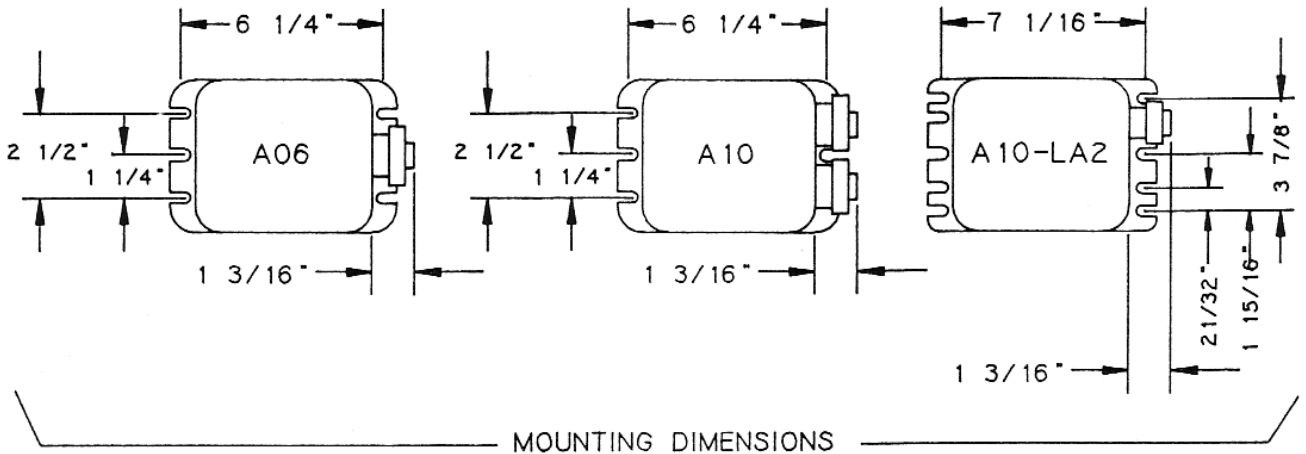

PROTECTION CONTROLS, INC.

7317 N. LAWNDALE AVENUE  
 P.O. BOX 287 • SKOKIE, ILLINOIS 60076-0287  
 (847) 674-7676 • Chicago Phone: (773) 763-3110  
 FAX: (847) 674-7009

NOTE:  
 IGNITION SYSTEMS SHALL NOT BE  
 USED IN LIEU OF COMBUSTION  
 SAFEGUARDS.

INSTALLATION, OPERATION AND  
 MAINTENANCE SHALL CONFORM  
 WITH NATIONAL FIRE PROTECTION  
 ASSOCIATION STANDARDS, NATIONAL  
 AND LOCAL CODES, AND AUTHORITIES  
 HAVING JURISDICTION. ANY MODIFI-  
 CATION VOIDS APPROVALS.